


# UNDERCARRIAGE CLEANER STATIONARY

- ✓ Compact and solid construction
- ✓ Equipped with stabilizer nozzles
- ✓ Modular design




The TUW stationary is perfect for fixed ramp over or sub-floor undercarriage wash systems. Industrial grade stainless plates and boxes come complete with quad bearing swivels and welded balanced rotor arms. The high lift wash design removes heavy debris and cleans without damage to the vehicles undercarriage. Whether a new install or system upgrade this is sure to impress.

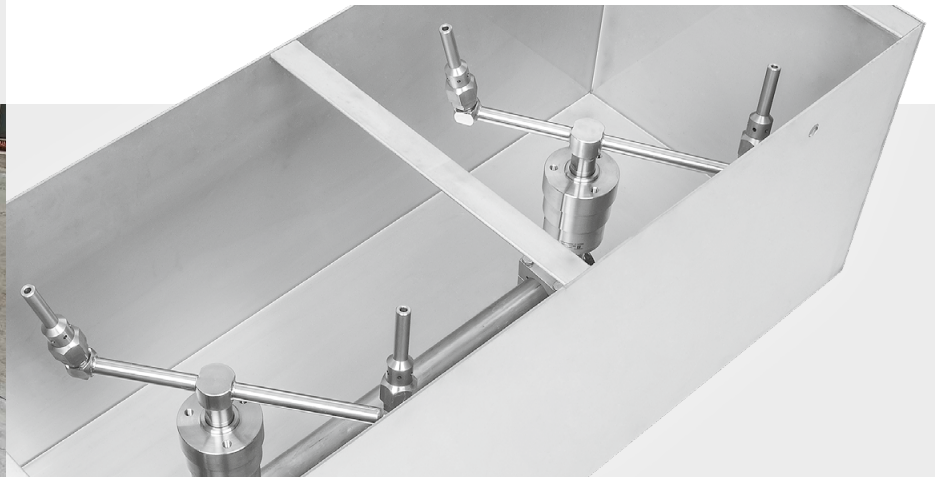


## TUWs

Part No.	Dimensions (L/W/H)	Weight	Swivels	Rotor arms	Stabilizer Nozzles	Nozzles
80.630	750x300x275	32kg	2x DYT	200x250 mm	4x 14.901	--- *

\* Requires 4x EG-nozzles, according to your pump specifications

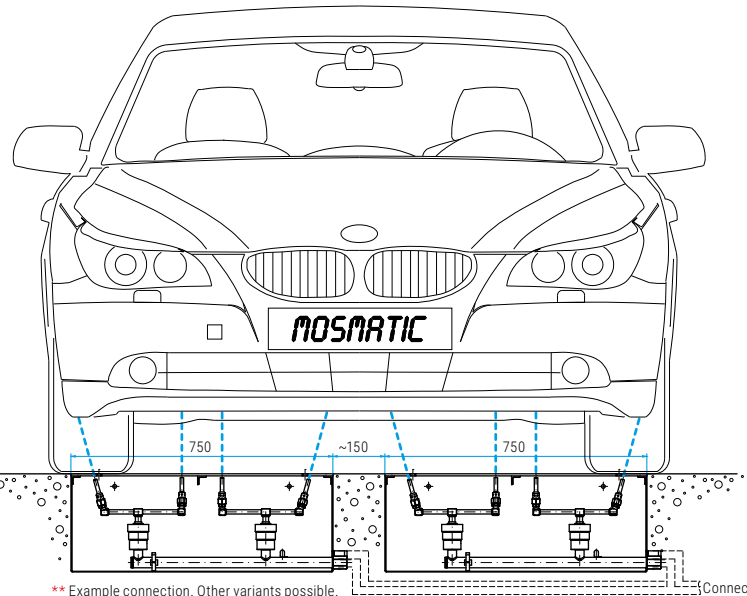

\*\* Example connection. Other variants possible. Connection\*\*

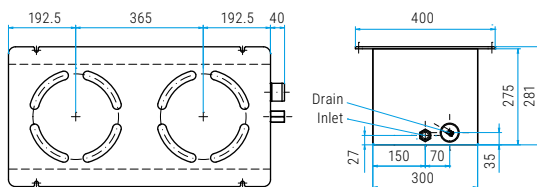

## Stabilizer Nozzle

(without insert nozzle)

Part No.	IN
14.901	1/4" NPTM
14.902	1/8" NPTM

## TECHNICAL DATA

<b>Pressure</b>	275 bar (27.5 MPa)
<b>Temperature</b>	120°C
<b>RPM</b>	up to 2000 rpm
<b>Body</b>	750x300x275mm
<b>Water connection</b>	G3/4" F
<b>Water drain</b>	2"
<b>Throughput medium</b>	pH 3-12

## Legend

M.. = metric thrust, ..M = male, F = female, G = gas pipe thrust, R = gas pipe thrust conical, QV = quick connects, SV = profile ring fitting  
D = diameter, L = length, NW = nominal width, SW = wrench size, IN = media input, OUT = media output, RS = basic position